





UNIMECH GROUP, MALAYSIA



A MEMBER OF UNIMECH GROUP, MALAYSIA

WAFER TYPE PTFE LINED BUTTERFLY VALVE UNIVERSAL FLANGED

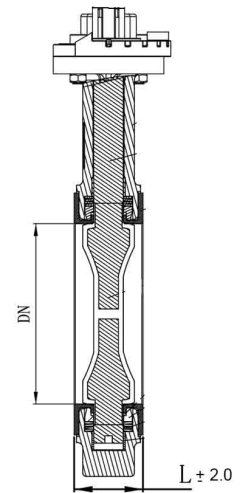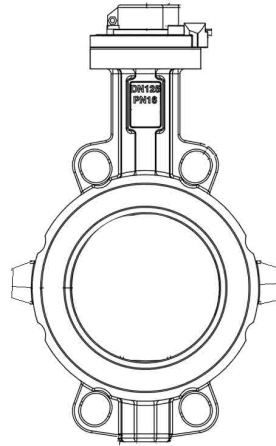

Specification :

Design Standard: BS EN593
 Face to Face : BS EN558-1
 Flange : EN 1092-1 PN10/16 JIS B2210 10K
 DIN 2501 PN10/16 ANSI B16 125/150
 Top Flange : ISO 5211
 Working Pressure : 1.6 Mpa
 Hydrostatic Seal Test : 1.76 Mpa
 Body Test Pressure : 2.4 Mpa
 Working Temperature : -20 ~ 180 °C
 40mm to 150 mm : Lever operated
 200mm : Gear operated

Technical Data

Material

No	PART	MATERIAL
1	BODY	CF8M
2	SEAT	PTFE
3	DISC	CF8M + PTFE
4	STEM	SS 416
5	WASHER	SS 316

Dimension in mm

DN	L	Torque (Nm)	Cv
40	32.0	13	18
50	42.0	15	31
65	44.7	17	55
80	45.2	23	87
100	52.1	40	140
125	54.4	62	224
150	55.8	102	328
200	60.6	192	572

Note : Cv = US Gallon per minutes

The contents of this literature are for informative purposes only. Arita is not responsible for suitability or compatibility of these products in relation to system requirement. For specific requirements, consult Arita or its distributors. Arita reserves the right to change or modify product design without prior notice.

Our Ref. : ARSBFL1-, ARSBFG1- 10/21